



# LT900 Series

Continuous Inkjet Printer




*Designed for harsh environments  
& 24/7 operations*

**[EMC Compatibility]**

**[Superior Print Quality]**

**[Self-Calibration Technology]**



Coding Tomorrow

[www.Leadtech-NA.com](http://www.Leadtech-NA.com)

LEAD TECH-North America




## Specifications

| Model                         | LT900  | LT980 HRS  |             |             |
|-------------------------------|--|--|-------------|-------------|
| Material                      | Teflon coating/Stainless steel   |  |             |             |
| Printing Performance          | 1-4 Lines(7x5matrix)<br>1-5 Lines(5x5matrix)<br>Max. speed=1128.09ft/min@5x5   | 1-4 Lines(7x5matrix)<br>1-5 Lines(5x5matrix)<br>Max. speed=1410.76ft/min@5x5 |             |             |
| Font Matrix                   | <b>1 Line:</b> 5x5, 7x5, 9x6, 12x8, 16x11, 19x14, 24x17, 32x22. <b>2 Lines:</b> 5x5, 7x5, 9x6, 12x8, 16x11. <b>3 Lines:</b> 5x5, 7x5, 9x6<br><b>4 Lines:</b> 5x5, 7x5. <b>5 Lines:</b> 5x5             |  |             |             |
| Printing Distance             | Character height: .039 to .591in<br>Printing distance: 0.079 to 1.181in Best: .394in   |  |             |             |
| Operating System              | LT-Touch Unique System, Multiple languages   |  |             |             |
| Print Content                 | Alpha Numeric, Serial Number, Barcode, Shift, DM/QR Code, UPC A&E, EAN 8 & 13, Code 128 A, B & C, Code 125, GS1, UCC/EAN 128, Code 39, Logo, Automatic Date/Time/Expiry date, Special Characters, etc. |  |             |             |
| Communication                 | USB, RS485, Ethernet   |  |             |             |
| System Language               | English, Spanish, German, Russian, Polish, Persian, Arabic, Korean, Indonesian, Vietnamese, Croatian, Thai, Slovenian, Slovak, Bosnian, Portuguese, Italian, Chinese, etc. Customizable language       |  |             |             |
| Memory Storage                | 1000+Messages  |  |             |             |
| Industrial Protection         | IP65   |  |             |             |
| Printhead/Umbilic             | Super soft, length 9 ft  | Super soft, length 9 ft  |             |             |
| Printing Direction            | ABC<br>--->  | ABC<br><---  | ABC<br>---> | ABC<br><--- |
| Cartridge Volume              | Ink (500ml)<br>Make-up (750ml)   |  |             |             |
| Temperture/<br>Humidity Range | 32-113°F<br>0-95% Relative Humidity, Non-Condensing  |  |             |             |
| Power                         | AC100-240V, 50/60hz, 100VA   |  |             |             |

\*LT900 is standard model, LT980 HRS is a high-speed, high-resolution,small font model (suitable for applications with high-precision fonts)

## Dimensions

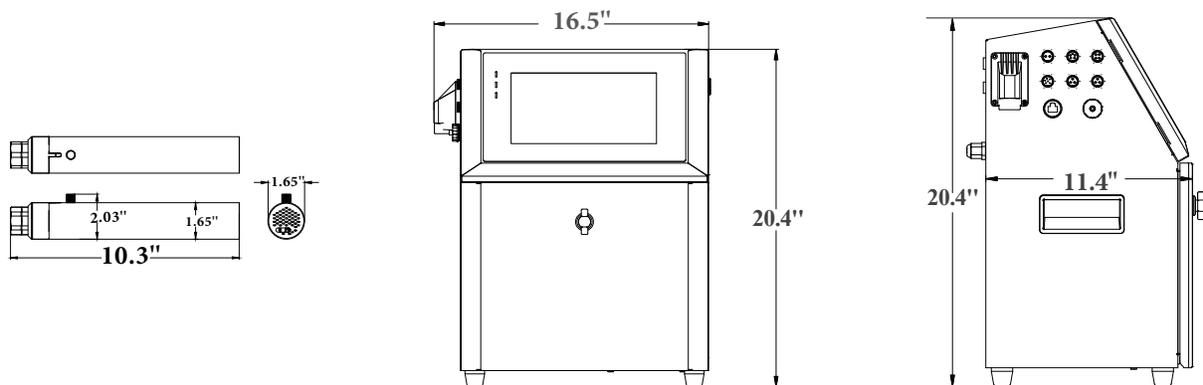

### LEAD TECH - NORTH AMERICA

Telephone: 507-701-6787

Email: Support@LeadTech-NA.com

Web: www.LeadTech-NA.com

Address: 300 3rd St SE Ste 6 Rochester, MN 55904